

EFC 137 *XSafe*

Self Contained Ice Machine 157 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity



FEATURES

- Produces "Cubelet" ice (compressed ice flakes). Ice scoop holder located within ice-storage bin.
- Resistant stainless steel exterior.
- Reliable electronic controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only). Optional "Demineralized Water" adaptor kit
- Easily accessible front panel mount ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- Ergonomically designed ice-storage access, with disappearing door. Door-closing movement dampening system.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/HZ/PH

230\50\1



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 157 kg

October 2025


EFC 137 *XSafe*

Self Contained Ice Machine 157 kg

Scotsman[®]
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 157 kg

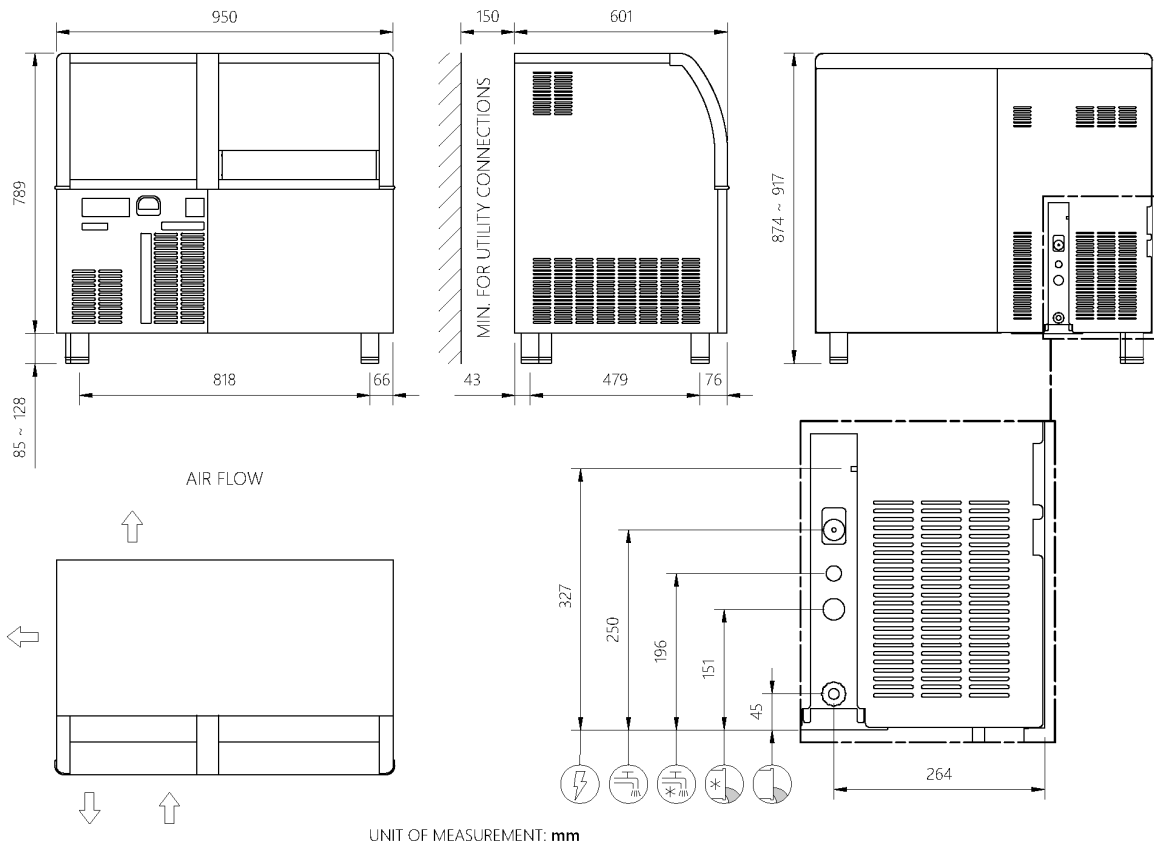

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)									
950 x 605 x 789 mm			1030 x 680 x 960 mm									
Net weight			Gross weight									
69 kg			84kg									
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm ²	A
EFC 137 OX	230\50\1	A	kg	kg	kg	40	1,2	14,4	5	635	3 x 1,5	10