

Modular Ice Machine 300 kg

Item #:

Project:

Quantity:



FEATURES

- Top Materials: AISI 304 Stainless steel and new removable grid
- Core Ice System: Stable evaporator system (Axial load).
- New Core Evaporator: Highly balanced auger (double fly system).
- New Gearmotor: Evaporator strability improved and noise free.
- Innovative Ice Breaker: Very dry flake ice - 12% of water contents.
- Durable Operations: High efficiency and better performance.
- Easy to Clean: Facilitated cleaning process and XSafe standard.
- New High-tech Water Sump with easy regulation system.
- New ice level sensor: for seamless operations.
- New Display: Touch & Smart.
- XWave: New App with improved electronics and programming.



MXF 627
Superflake ice
Residual water content 12%

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE
V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins	kg
MXF 627	SB322	168



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 300 kg

Item #:

Project:

Quantity:

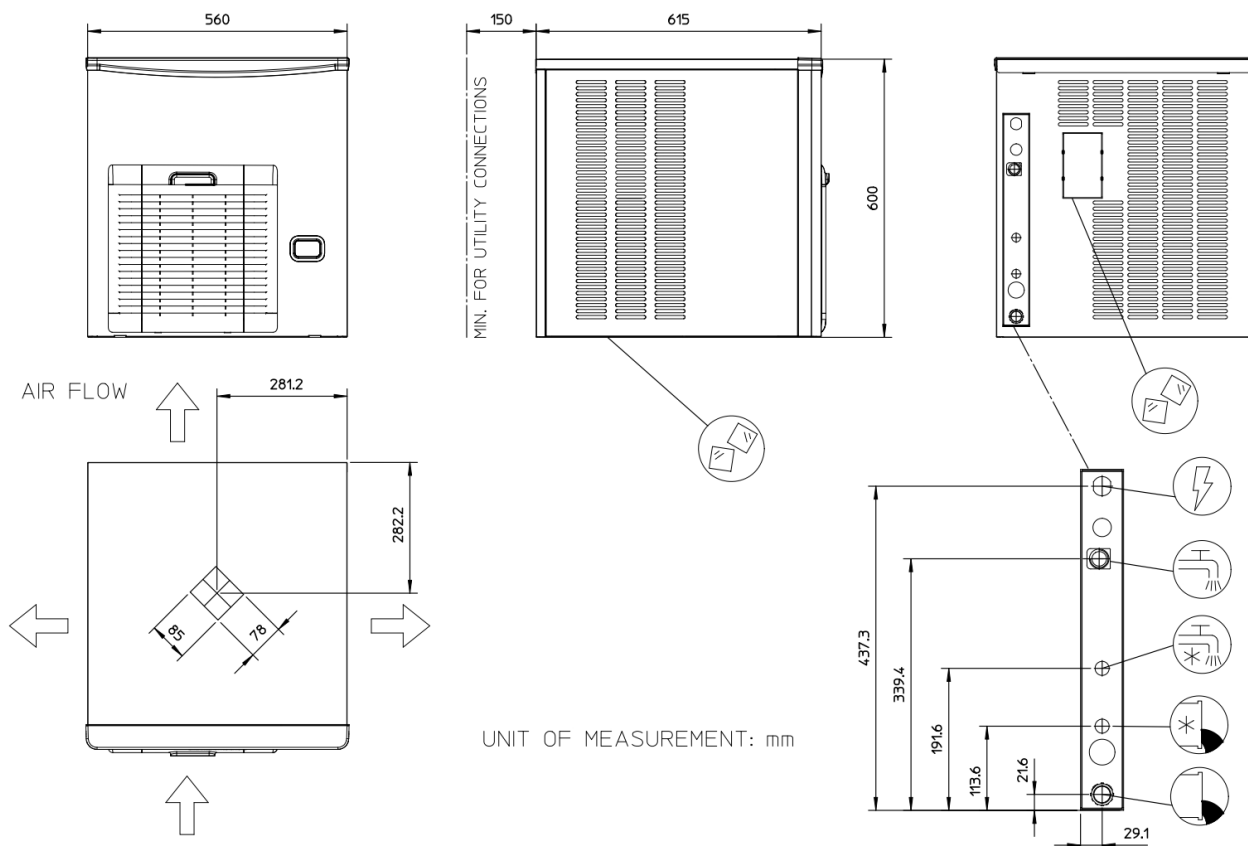

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		560 x 615 x 600 mm			Carton (W x D x H)		625 x 690 x 775 mm				
Net weight		51 kg			Weight		61 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXF 627 AS OX	230/50/1	300	270	230	10.7	24.7	9	939	1080	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions