

MXG 428 *XSafe*

Modular Ice Machine 190 kg

Item #:
Project:
Quantity:



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG L 428
Large Gourmet 39 g
Ø 38 x H 41 mm



MXG M 428
Medium Gourmet 20 g
Ø 30 x H 34 mm



MXG S 428
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head	Bins		kg
MXG 428	✓	SB193	129
	✓	SB322	168
	BINTOPMXGSB55	SB550	252
	●	UBH1100	553
	●	UBH1600	812
	●	SIS700	318 + 73
	●	SIS1350	613 + 73 + 73

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Modular Ice Machine 190 kg

MXG 428 *XSafe*

Modular Ice Machine 190 kg

Item #:
Project:
Quantity:

Modular Ice Machine 190 kg

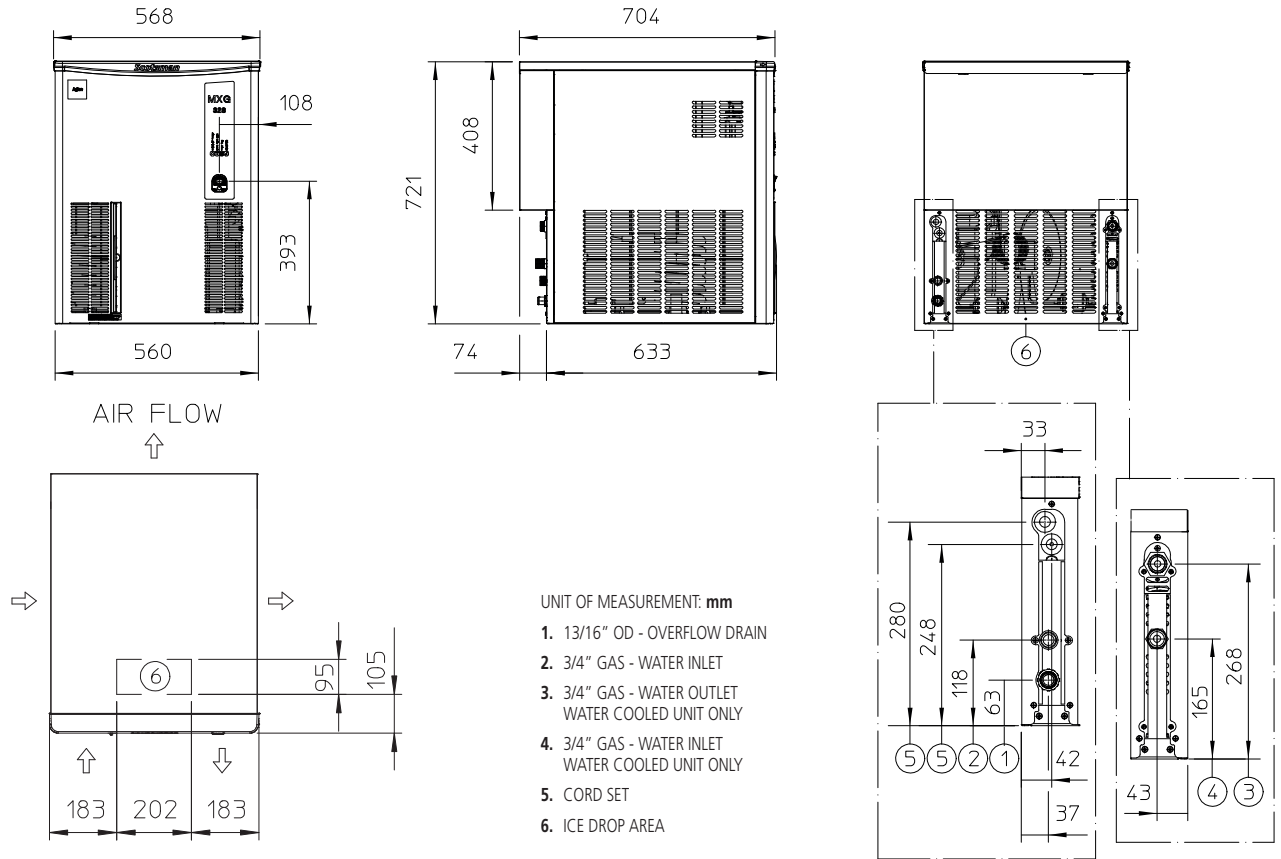

UNIT DATA		SHIPPING DATA	
Size (W x D x H)	568 x 704 x 721 mm	Carton (W x D x H)	630 x 770 x 910 mm
Net weight	66 kg	Weight	77 kg

Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXGL 428 AS	230/50/1	167	167	130	26.5	34.5	13.8	1750	5030	3 x 1.5	16
MXGL 428 WS	230/50/1	172	170	147	20.4	30.0	106.3	1400	5030	3 x 1.5	16
MXGM 428 AS	230/50/1	190	180	128	28.7	36.7	15.4	1850	5030	3 x 1.5	16
MXGM 428 WS	230/50/1	195	190	165	19.5	32.2	150.0	1400	5030	3 x 1.5	16
MXGS 428 AS	230/50/1	195	182	135	28.9	39.0	20.8	2000	5030	3 x 1.5	16
MXGS 428 WS	230/50/1	195	192	170	20.0	34.0	185.4	1400	5030	3 x 1.5	16
MXGM 428 AS	230/60/1	180	169	128	32.0	41.0	16.3	2000	5922	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions